SANSUI SD-5000 SCHEMATIC DIAGRAM

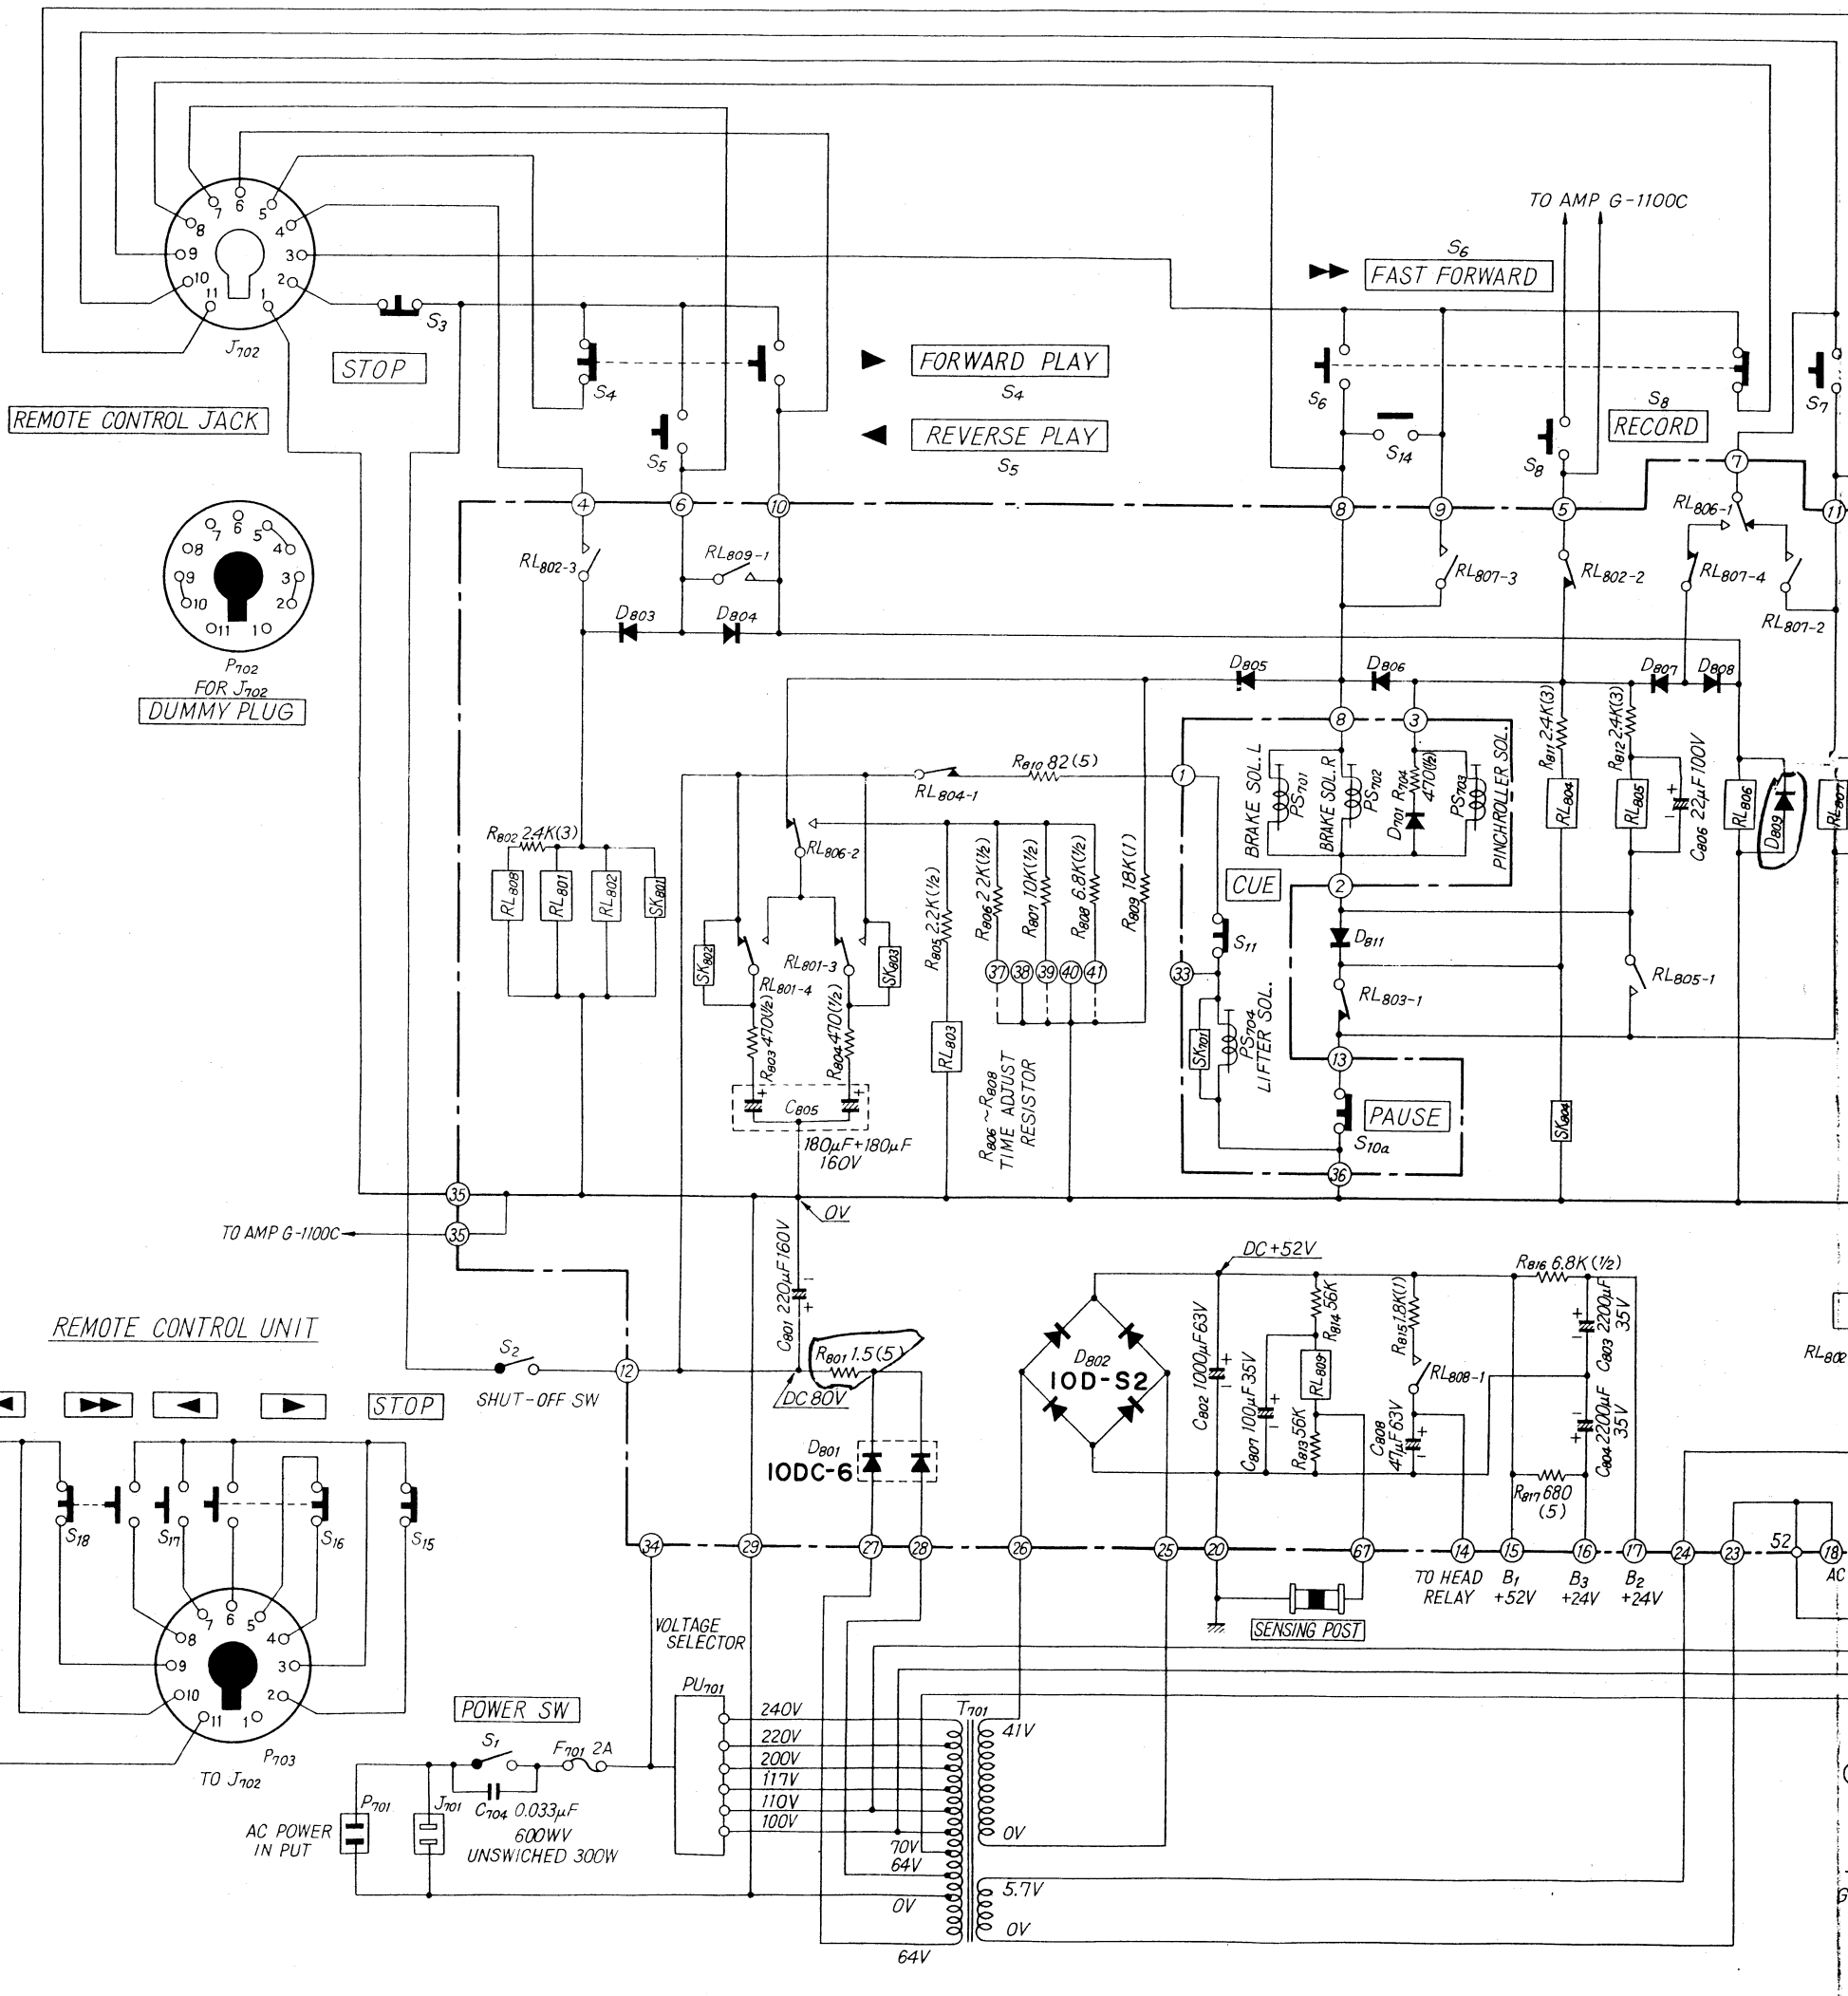

* Manufacturer reserves right to change design and/or specifica-tions without notice for purpose of improvement.

CHEMATIC DIAGRAM OF TAPE TRANSPORT MEC

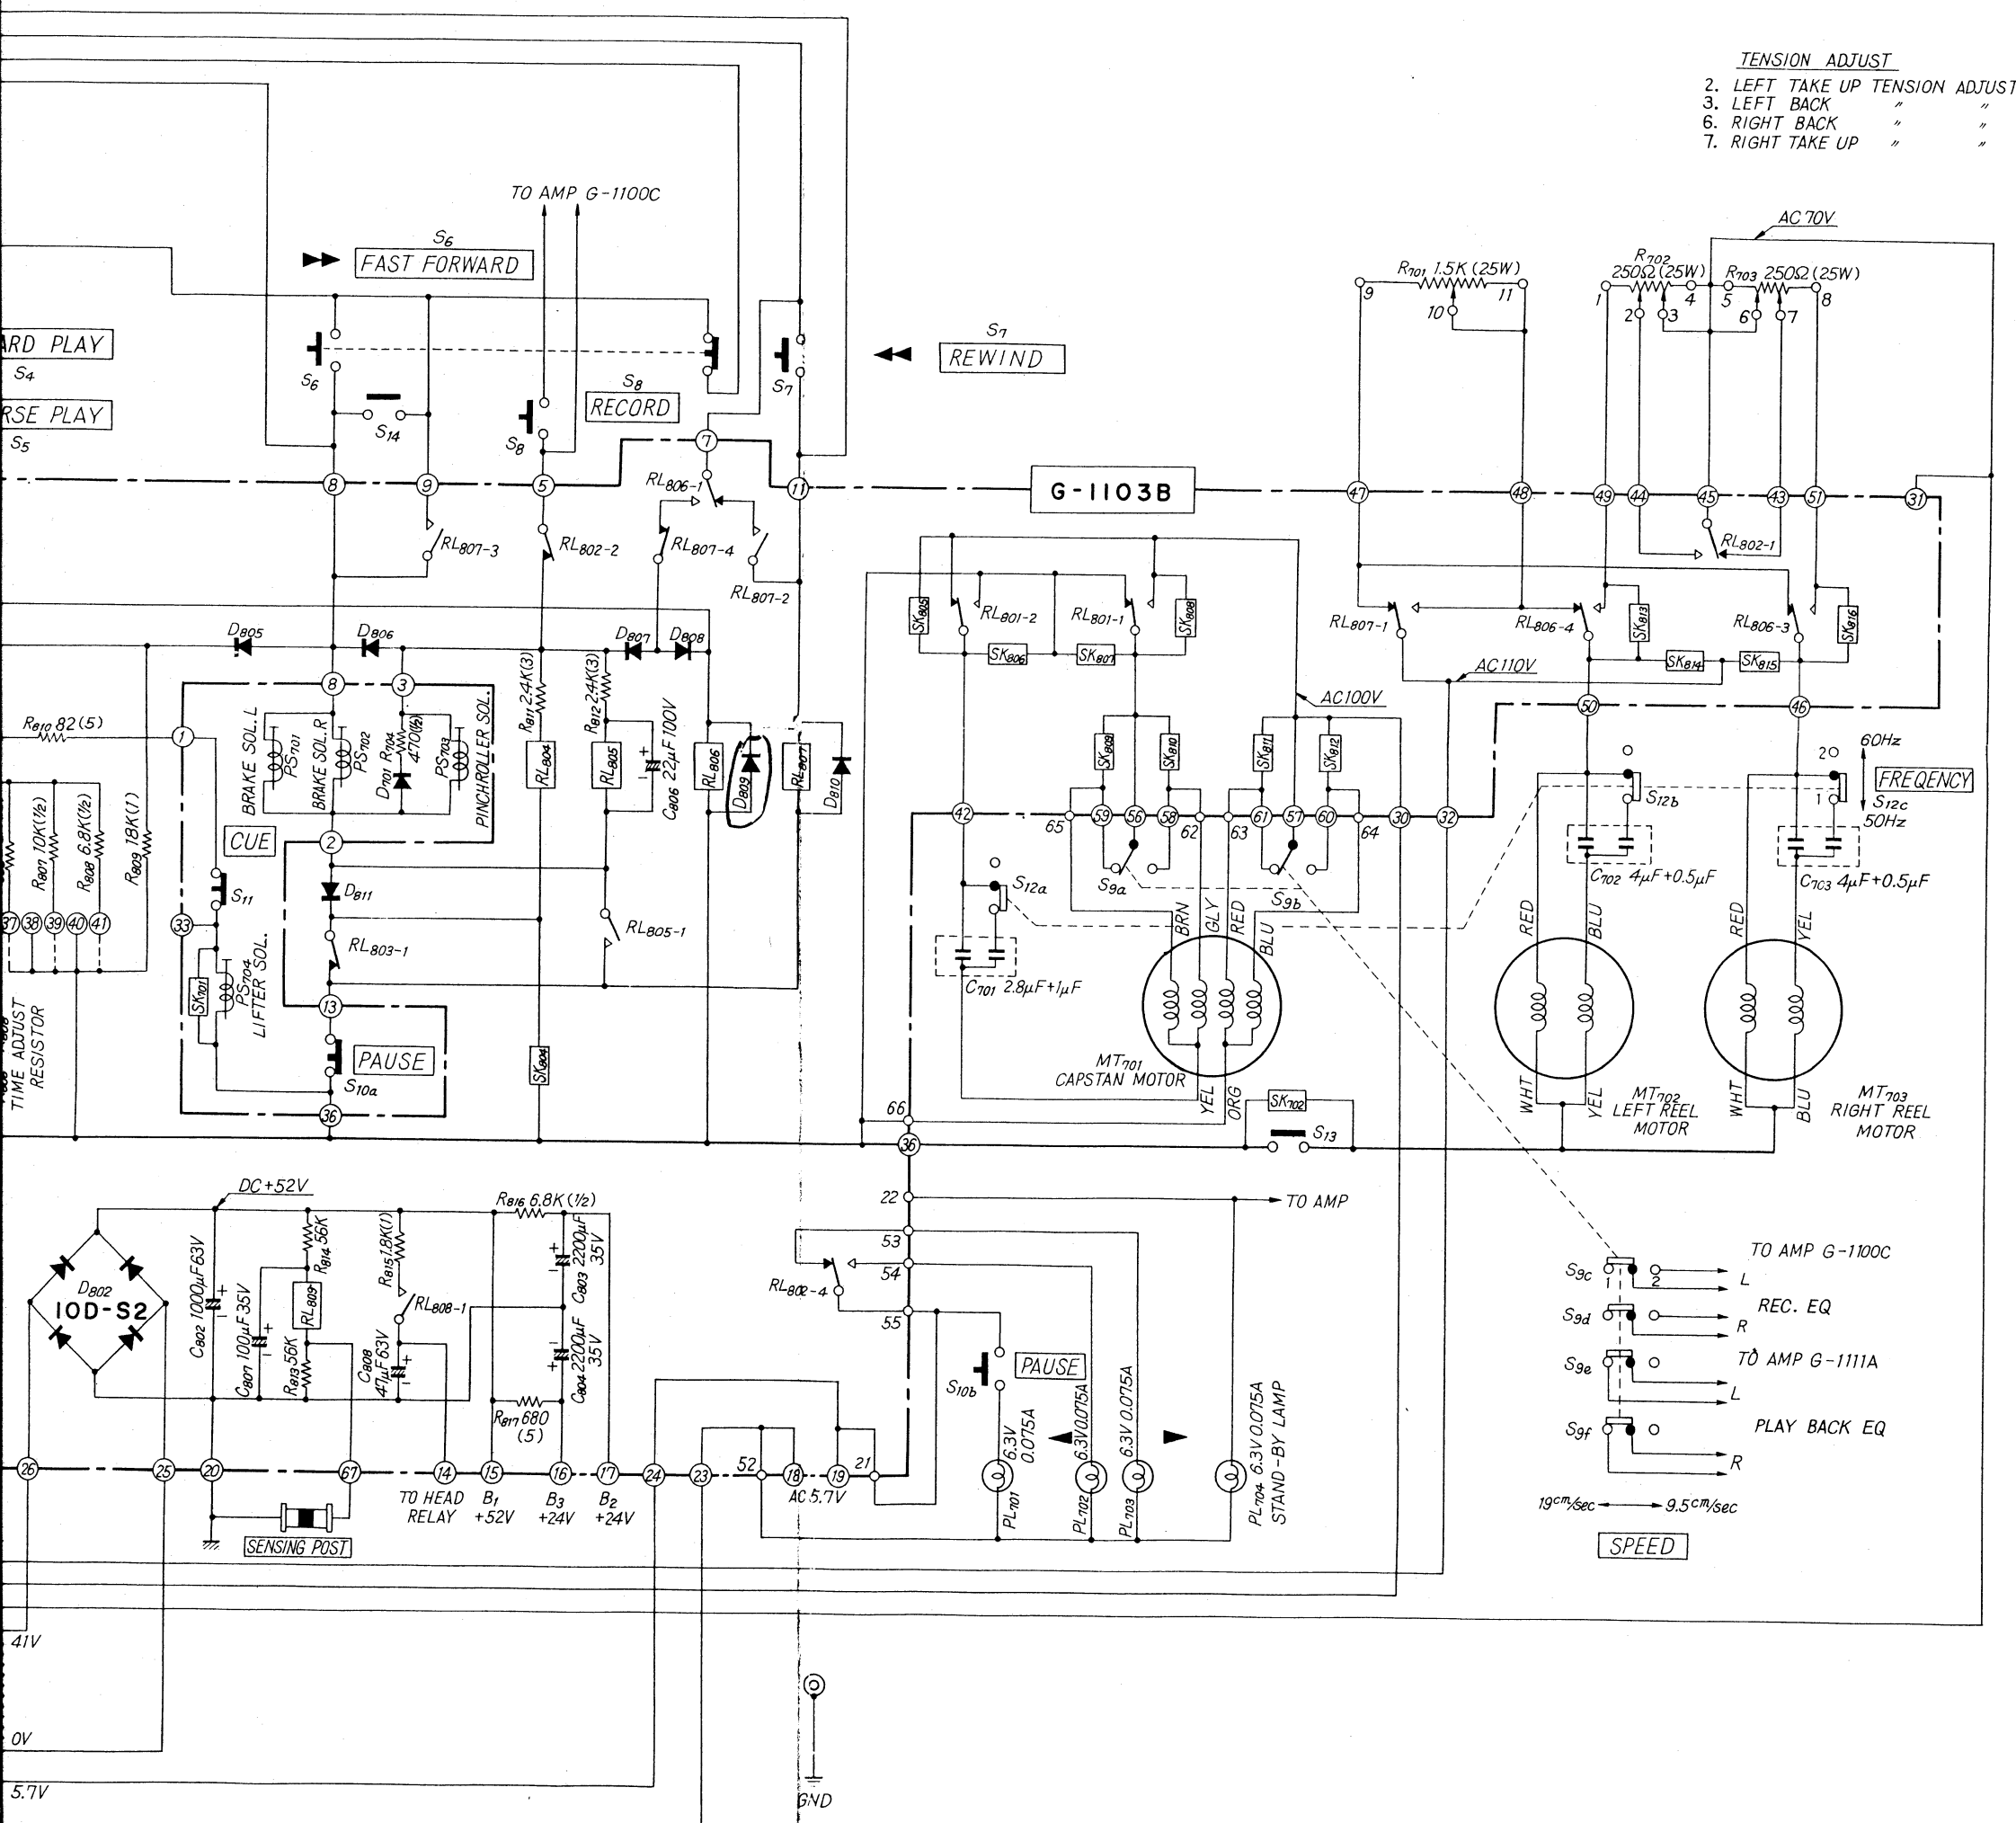

M OF TAPE TRANSPORT MECHANISM

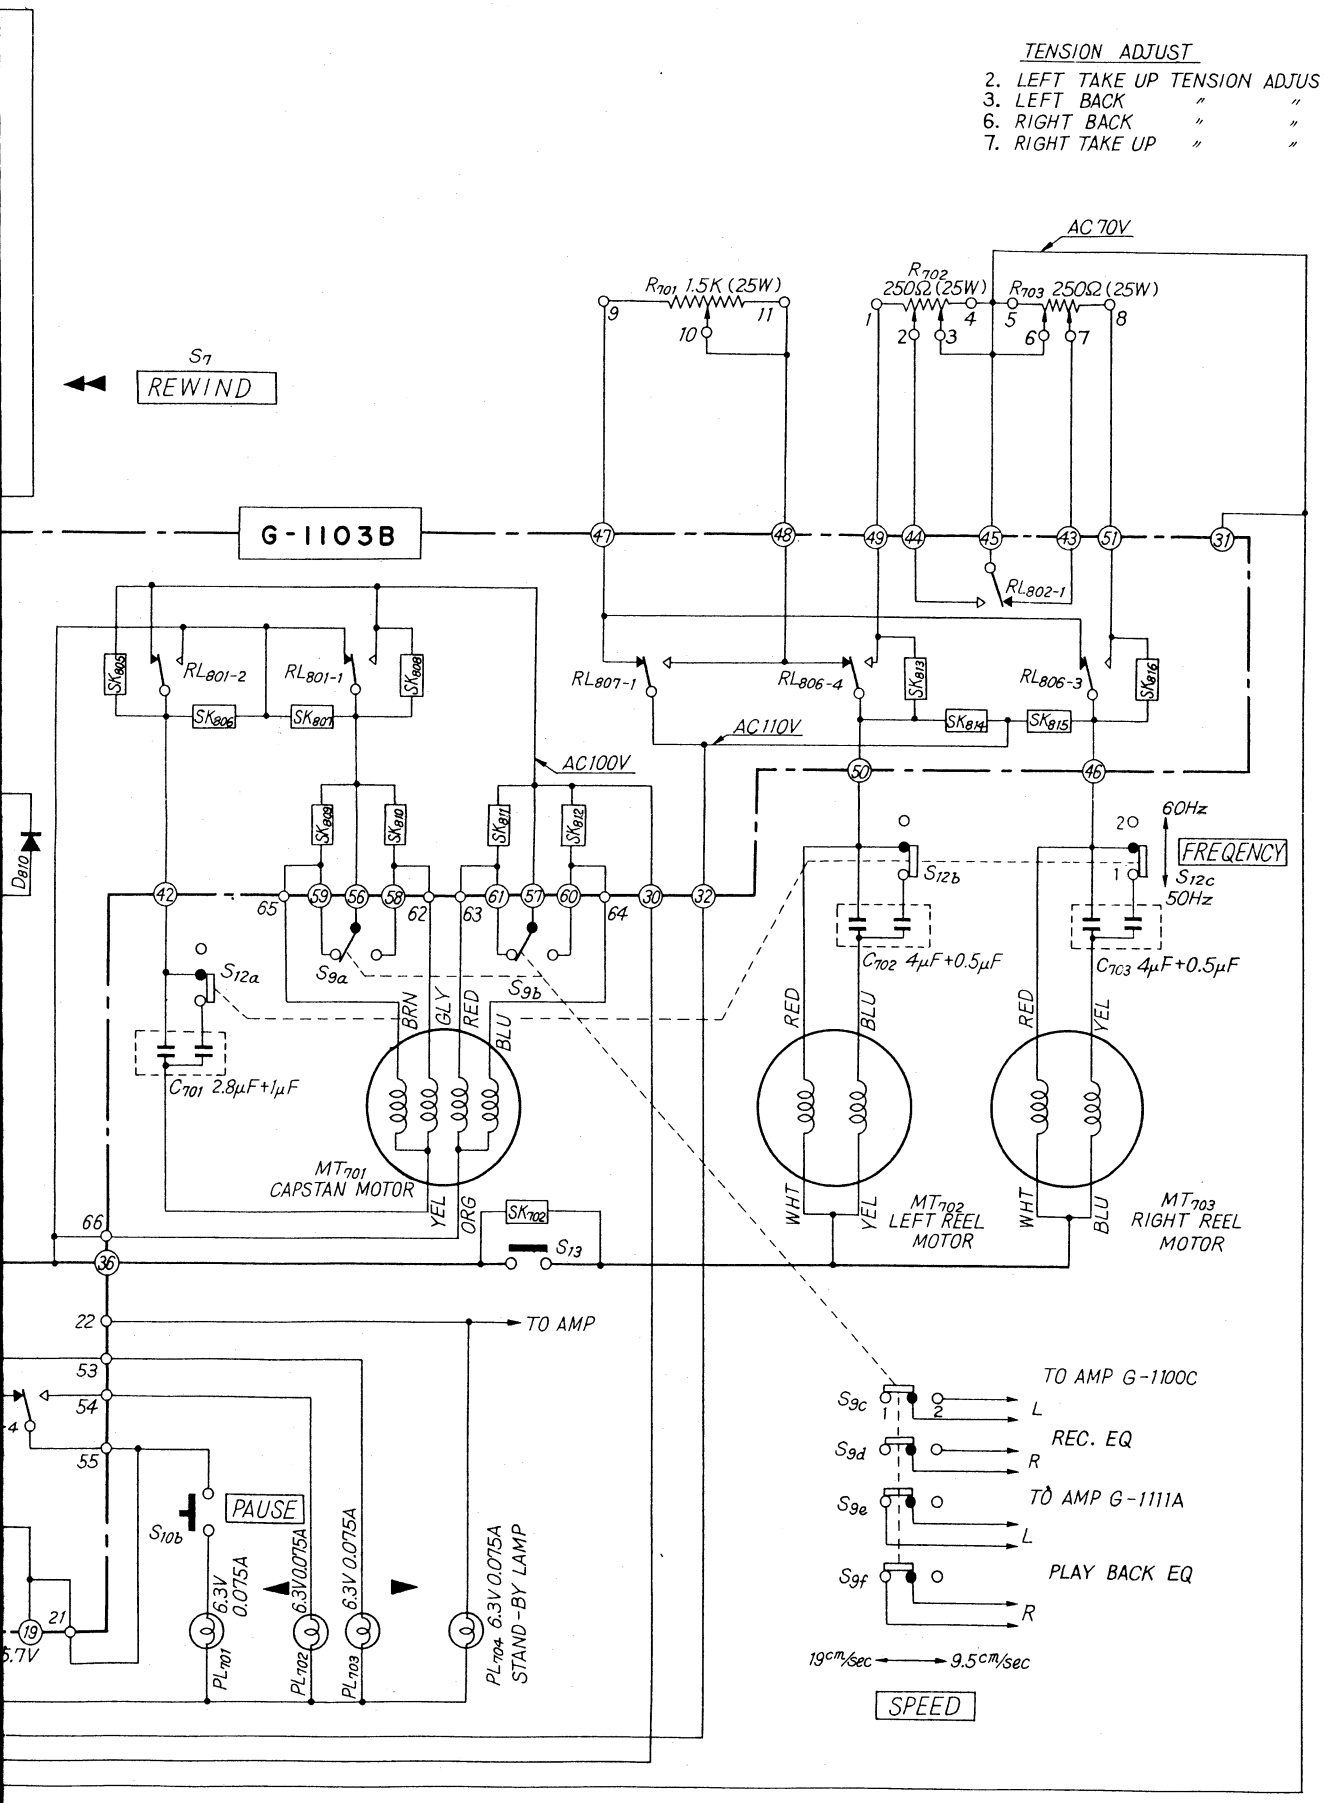

TENSION ADJUST

2. LEFT TAKE UP TENSION ADJUST
3. LEFT BACK 〃 〃
6. RIGHT BACK 〃 〃
7. RIGHT TAKE UP 〃 〃

S_1	POWER SW
S_2	SHUT OFF SW
S_3	STOP
S_4	FORWARD
S_5	REVERSE
S_6	F.F
S_7	REWIND
S_8	RECORD
$S_{9a\sim f}$	SPEED
1	7½ IPS (19cm/sec)
2	3¾ IPS (9.5cm/sec)
$S_{10a\sim b}$	PAUSE
S_{11}	CUE
$S_{12a\sim c}$	FREQENCY CHANGE
1	50Hz
2	60Hz
S_{13}	BRAKE (attach with brake solenoid)
S_{14}	〃 (〃 〃)

BOTTOM VIEW

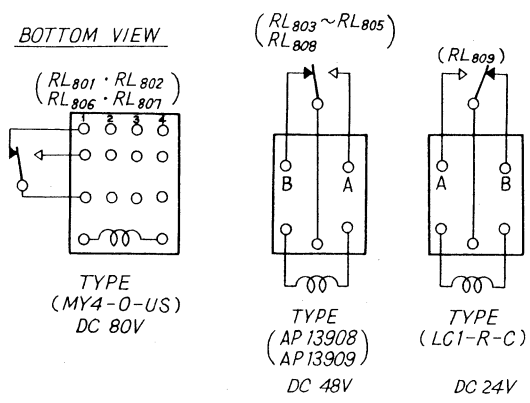



RELAY FUNCTION

RELAY / FUNCTION	RL 800 1	2	3	4	5	6	7	8	9	BRAKE SOL.	RL 101	RL 401
STOP ■												
▶				○	○	○				○	○	
◀	○	○		○	○	○		○		○	○	○
▶▶										○	○	
◀◀							○			○	○	
RECORD				○	○	○				○	○	○
AUTO REVERSE	○	○	○	○	○	○		○	○		○	

NOTE

1. The mark ○ shows the relay is energized.
2. RL_{803} is the delay relay (Open after 2 sec.)

CONNECTION (TO AMP G-1100)

G-1103B ⑭	RL_{101} (HEAD RELAY)	- G-1100C	⑭
⑮	B_1	+DC 52V	⑮
⑯	B_2	+DC 24V	Ⓐ
⑰	B_3	+DC 24V	Ⓗ
⑱	AC 5.7V		⑨
⑲	AC 5.7V		①
⑳	E		⑦
㉒	STAND BY SW		⑩
㉟	0V		⑬
RECORD SW	N.O	DC +80V	⑪
	COM	DC +80V	⑫

SANSUI ELECTRIC CO., LTD.
Printed in Japan (N1020M)